



bareiss®

Digital Hardness tester HPE III

DIN ISO 7619, DIN EN ISO 868, ASTM D2240, NF EN ISO 868, JISK 6253



Registered design



New generation

Hardness test with temperature indication for specimen and environment

- ✓ Shore-hardness
- ✓ Specimen-/environment temperature
- ✓ Humidity


HPE III provides significant test data for the use in laboratory or field



PRODUCT INFORMATION

Innovative functions for HPE III

Display of HPE III

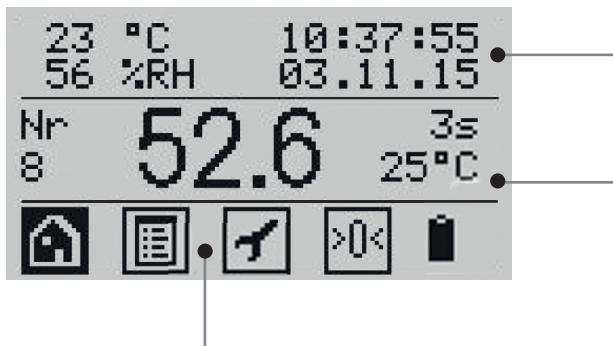

The top section of the display indicates the ambient temperature and humidity, current date and time.

The main section indicates the hardness result, the specimen temperature, the measuring time and the number of data saved.

The navigation bar leads you through the menu:
home | data management | setting / zero | battery level



Scope of delivery: suitcase, HPE III, Control ring 40 Shore, USB/RS232 power cable with plug



Registered design



Bareiss offers optional DAkkS- Certificate and reference blocks as accessory

Packing unit: weight 700 g



Heinrich Bareiss Prüfgerätebau GmbH
DAkkS/DKD-Kalibrierlaboratorium
Breiteweg 1 | 89610 Oberdischingen
Germany
info@bareiss.de | www.bareiss.de
Phone: +49 (0) 7305 / 96 42-0
Fax: +49 (0) 7305 / 96 42-22

